


DC Current Amplifier (Isolated)

❖ Model No : DCA-520

❖ Standard Specifications

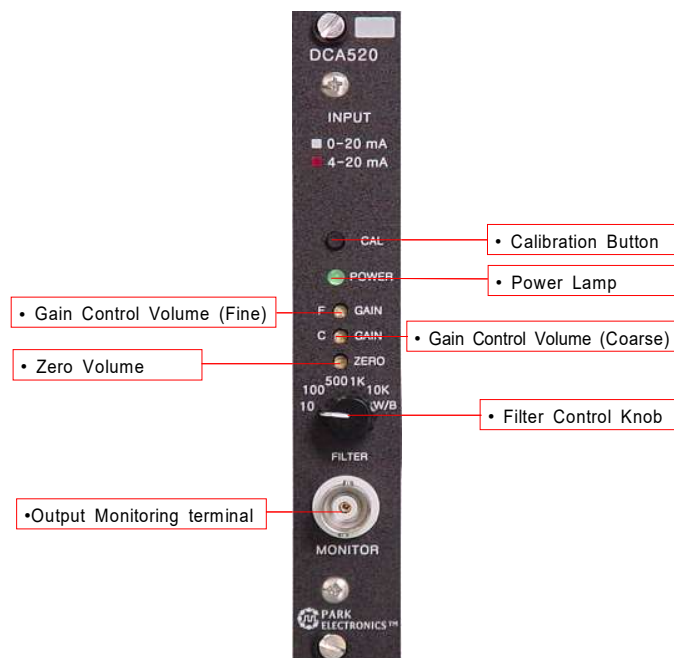

- **Number of channels**
1 channel / 1 unit
(multi-channel operation possible using housing case)
- **Amplifier Voltage**
±15V
- **Sensor Excitation Voltage**
24VDC
- **Nonlinear**
0.02% F.S
- **Frequency response**
30kHz/-3dB
- **Input Signal**
4 ~ 20mA, 0 ~ 20mA
- **Correction Output**
DC 1.25V
- **Output Signal**
DC 0 ~ 10V (4~20mA : Specify when ordering)
- **Low Pass Filter**
10, 100, 500, 1k, 10k, W/B Selectable
- **Power supply**
220 or 110VAC (Option), ±10% 50/60Hz, approx. 8VA

❖ Sub-Rack (Real)

• Rack Mount Type




• Hand Carrier Type



❖ Dimensional Drawing

• Amplifier Dimension

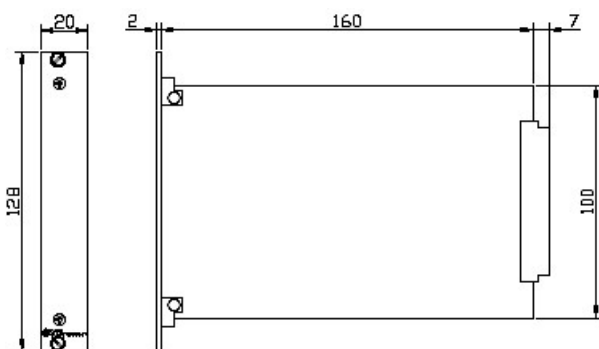

• Sub-Rack Dimension

Description	Model No	Width	
		W1	W2
4-channel case	3104	198mm	168mm
8-channel case	3108	280mm	248mm
16-channel case	3116	483mm	451mm

