

DC Voltage Amplifier (isolated)

Model No : DVA-510

Standard Specifications

Number of channels

1 channel / 1 unit
(multi-channel operation possible using housing case)

Amplifier Voltage

±15V

Sensor Excitation Voltage

5~15VAC (Option)

Nonlinear

0.02%F.S

Frequency response

30kHz/-3dB

Input Signal

DC 1, 5, 10, 20, 50V

Correction Output

DC 1V

Output Signal

DC 0 ~ 10V (4~20mA : Specify when ordering)

Low Pass Filter

10, 100, 500, 1k, 10k, W/B Selectable

Power supply

220 or 110VAC (Option), ±10% 50/60Hz, approx. 8VA



Sub-Rack (Real)

Rack Mount Type




Hand Carrier Type



Dimensional Drawing

Amplifier Dimension

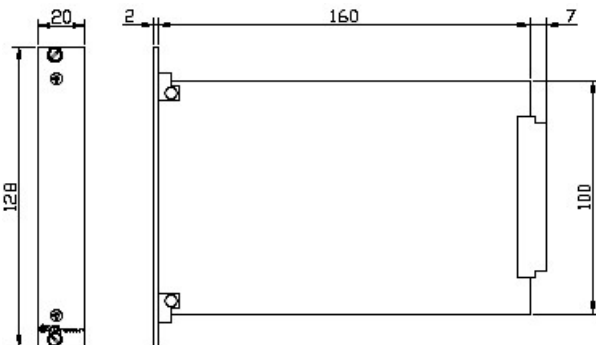

Sub-Rack Dimension

Description	Model No	Width	
		W1	W2
4-channel case	3104	198mm	168mm
8-channel case	3108	280mm	248mm
16-channel case	3116	483mm	451mm

