



► Features

- Peak, Hold, Data Protection(Key Lock), Auto Zero :
Front Key or External Signal Terminal Operation
- Offset Function

► Performance Specs

DISPLAY:

- Range: -199999 to 999999
- Decimal Point : Selectable Position
- 6-digit Segment FND
- CPU Bit : 8 Bit
- Output Bit : 16 Bit

SENSOR INPUT:

- 0~20kHz Square Wave (Scale Type)
- Excitation Voltage : DC5, 15V
- Accuracy : $\pm 0.02\%$ of reading
- Impedance : 100 Mohm

DUAL LIMIT RELAYS :

- Relay Mode : Hysteresis, Range Function
- Relay 용량 : AC 250V - 0.25A,
AC125V - 0.5A, DC24V - 1A

► Ordering Guide

ECI-6612- **1** **2** **3** **4** **5**

- 1 EXC** 0 = 12V (Standard)
1 = 24V (Option)
2 = 5V (Option)


- 1 Input** 0 = Totem Pole
1 = NPN 오픈 콜렉터
2 = 전압
3 = Line Driver

- 2 Output** 0 = None
1 = 0~10V
2 = RS232
3 = RS485
4 = BCD
5 = Binary
- } Option

- 3 Relay** 0 = Dual Relays
1 = Eight Relays (Option)

- 4 Power** 0 = AC Power
1 = DC Power (Option)

► Dimensions (mm)

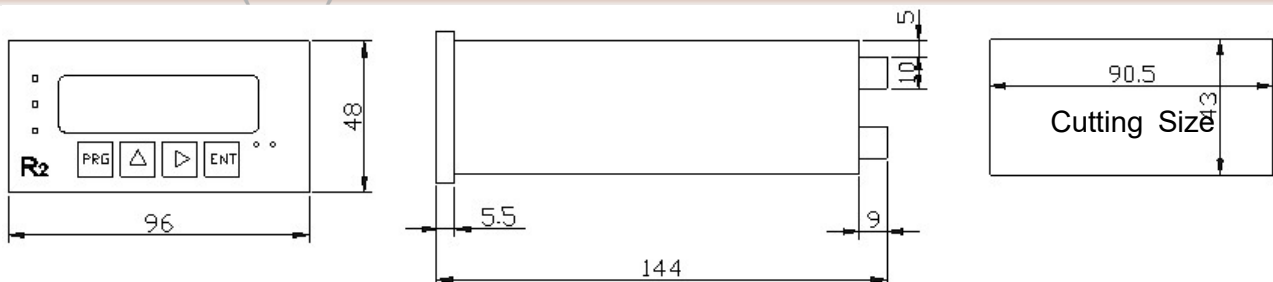

본 사양서는 파크전자(주) 고유의 양식으로, 무단 도용 시 법적인 조치를 취하게 됨을 알려드립니다.