



► Features

- Peak, Hold, Data Protection(Key Lock), Auto Zero :
Front Key or External Signal Terminal Operation
- Offset Function

► Performance Specs

DISPLAY:

- Range: -19999 to 99999
- Decimal Point : Selectable Position
- 5-digit Segment FND
- CPU Bit : 8 Bit
- Output Bit : 16 Bit

SENSOR INPUT:

- 0~100kHz Square Wave (RPM Sensor Type)
- Wave 100mV ~ 20Vpk
- Excitation Voltage : DC 12V
- Accuracy : $\pm 0.02\%$ of reading
- Impedance : 100 Mohm

DUAL LIMIT RELAYS


- Relay Mode : Hysteresis, Range Function
- Relay 용량 : AC 250V - 0.25A,
AC125V - 0.5A, DC24V - 1A

► Product Specification Chart


RPI-7522B- 1 2 3 4 5

- | | | |
|-----------------|--|----------|
| 1 EXC | 0 = DC 12V (Standard)
1 = DC 24V (Option) | |
| 2 Input | 0 = Square Wave
1 = Sine Wave
2 = NPN Open Collector | |
| 3 Output | 0 = None
1 = 0~10V
2 = 4~20mA
3 = RS232
4 = RS485
5 = BCD
6 = Binary | } Option |
| 4 Relay | 0 = Dual Relays
1 = Eight Relays (Option) | |
| 5 Power | 1 = 85~240VAC(50/60Hz, 15VA)
2 = DC 24V (Option) | |


► Dimensions (mm)



전 면

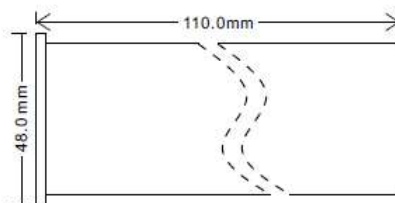

측 면

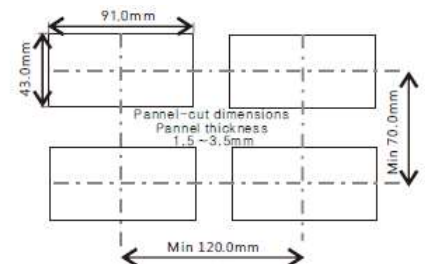

판넬 가공

본 사양서는 파크전자(주) 고유의 양식으로, 무단 도용 시 법적인 조치를 취하게 됨을 알려드립니다.