Digital Indicator

SCI - 501B
DC Voltage & Current Type

▸ Features

- Peak, Hold, Data Protection(Key Lock), Auto Zero : Front Key or External Signal Terminal Operation
- Sampling Speed (Max 15회)
- Auto Calibration, Offset Function
- Filtering : 10Hz, 100Hz, 1kHz, W/B (User Selectable)

▸ Performance Specs

DISPLAY

- Range : -19999 to 99999
- Decimal Point : Selectable Position
- 5-digit Segment FND
- Sampling Speed : 15회/sec
- Output Update : 500Hz
- Display Bit : 14.5 Bit (1/18,000)
- CPU Bit : 32 Bit

SENSOR INPUT

- DC 4 ~ 20mA or 0~10V (2선식, 3선식)
- Excitation Voltage : DC 24V (80mA) 외 Option
- Accuracy : ±0.02% of reading
- Impedance : 100 Mohm

DUAL LIMIT RELAYS

- Relay Mode : Hysteresis, Normal, Range Function
- Relay 용량 : AC 250V - 0.25A,
  AC125V - 0.5A, DC24V - 1A

▸ Ordering Guide

SCI-501B- 1 2 3 4

1 Input
0 = 4~20mA
1 = 0~10V
2 = 주문 사양 (Option)
3 = 0~5V (Option)

2 Output
0 = None
1 = 0~10V
2 = 4~20mA
3 = RS232
4 = RS485
5 = BCD
6 = Binary
7 = 0~5V
(2 ~ 7: Option)

3 Relay
0 = Dual Relays
1 = Eight Relays (Option)

4 Power
1 = 85~240VAC(50/60Hz, 15VA)
2= DC 24V (Option)

▸ Dimensions (mm)

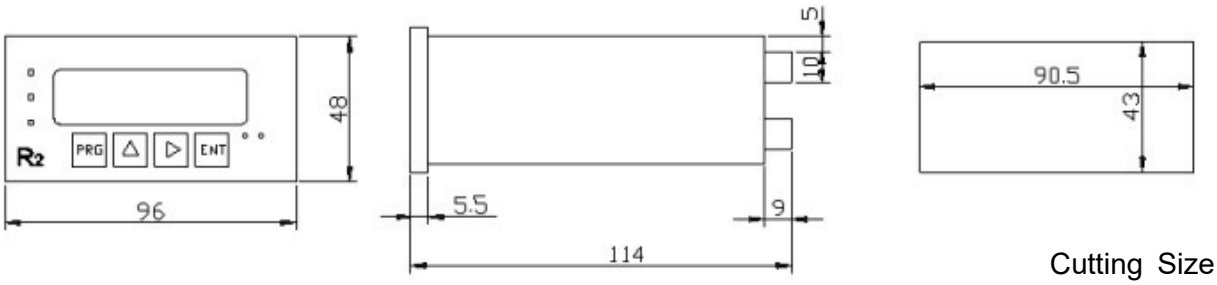

Cutting Size

본 사양서는 파크전자(주) 고유의 양식으로, 무단 도용 시 법적인 조치를 취하게 됨을 알려드립니다.

PARK ELECTRONICS™ Measurment & Control
부산광역시 사상구 대동로303, 306호 (감전동, 부산디지털밸리아파트형공장) 파크전자(주)
TEL : 051-329-7735 FAX : 051-329-7737
Web : www.parkelec.co.kr
E-Mail : park@parkelec.co.kr