


Servo Valve Amplifier

Model No : SVA-5007MG


Standard Specifications

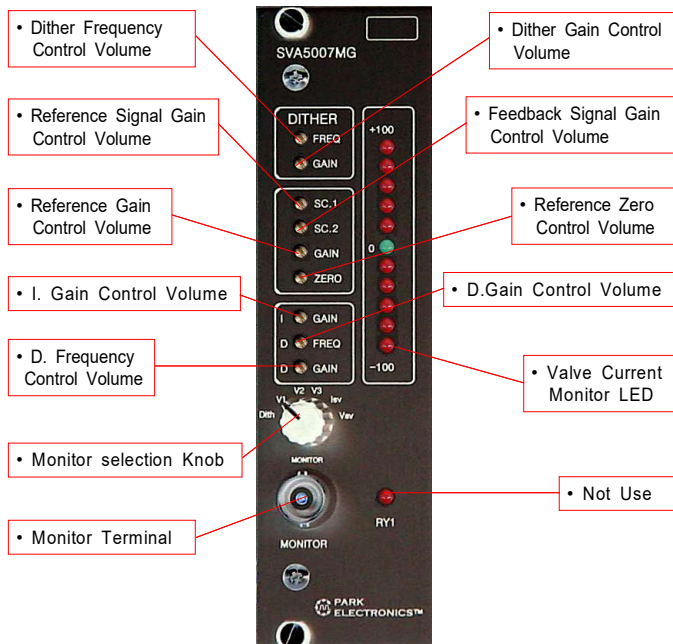


- Number of channels**
1 channel / 1 unit
(multi-channel operation possible using housing case)
- Output Mode**
Voltage or Ampers Selectable
- Nonlinear**
0.02%F.S
- Input Signal**
DC $\pm$ 10V
- Output Signal**
DC $\pm$ 10 ~ $\pm$ 40mA (For Servo Valve)
- Power supply**
 $\pm$ 15VDC or 24VDC
- Dither frequency adjustment range**
80 ~ 300HZ
- Servo valve resistance**
500 Ω 이하

Servo Amp Sub-Rack (Real)


• Front

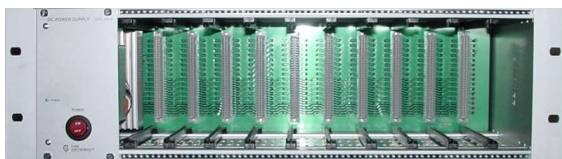

• Back

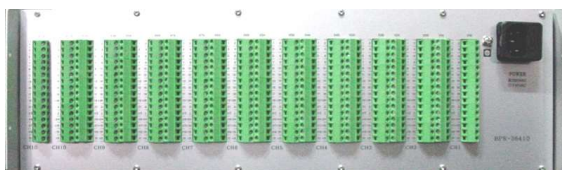


• Sub - Rack 외부 단자 결선

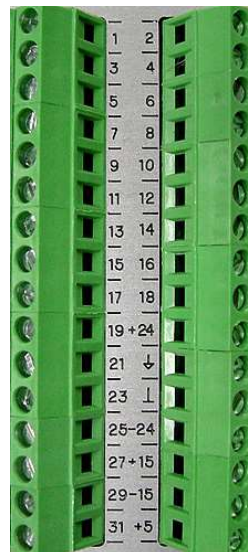

- 7) Command ($\pm$ 10V)
- 13) +out (Valve out)
- 15) -out (Valve out)
- 22) 0V Ref
- 24) COM (Amp. Power)
- 28) +15V (Amp. Power)
- 30) -15V (Amp. Power)

Dimensional Drawing

• Amplifier Dimension

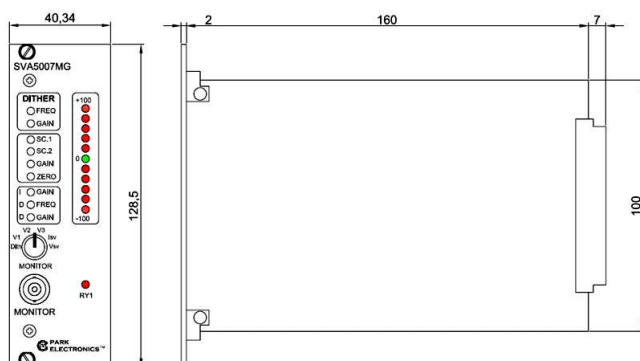

• Sub-Rack Dimension

