


Thermo Amplifier

Model No : TMA-110

Standard Specifications

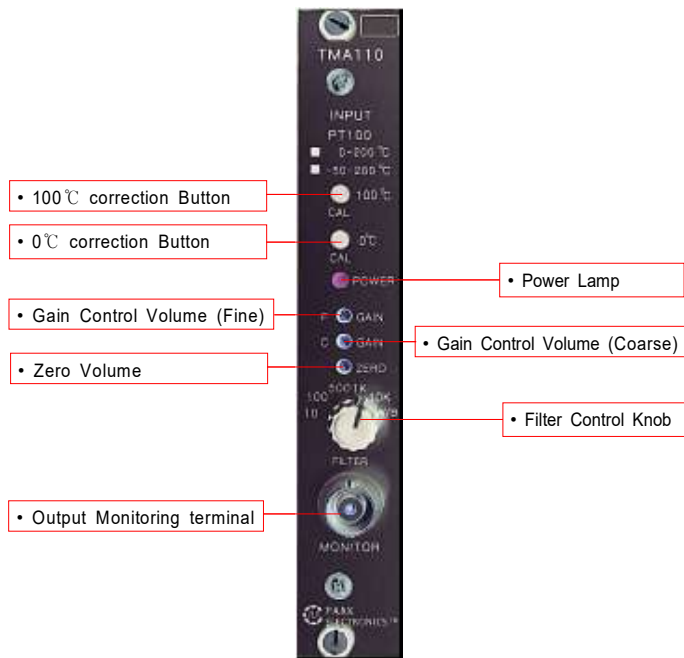

- **Balancing method**
Electronic auto-balancing
- **Number of channels**
1 channel / 1 unit
(multi-channel operation possible using housing case)
- **Amplifier Voltage**
±15V
- **Sensor Voltage**
5, 15V (Option)
- **Nonlinear**
0.02%F.S
- **Input Signal**
PT100Ω, RTD
- **Output Signal**
DC 0 ~ 10V
- **Low Pass Filter**
10, 100, 500, 1k, 10k, W/B Selectable
- **Power supply**
220 or 110VAC (Option), ±10% 50/60Hz, approx. 8VA

Sub-Rack (Real)

• Rack Mount Type




• Hand Carrier Type



Dimensional Drawing

• Amplifier Dimension

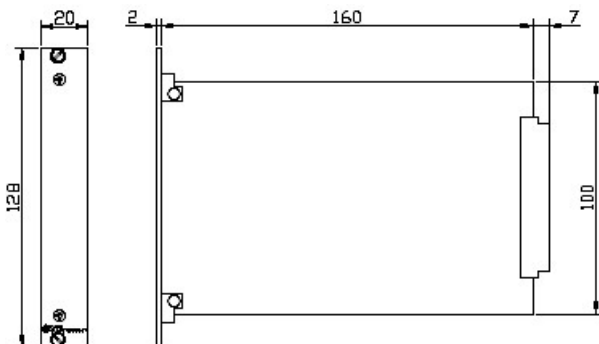

• Sub-Rack Dimension

Description	Model No	Width	
		W1	W2
4-channel case	3104	198mm	168mm
8-channel case	3108	280mm	248mm
16-channel case	3116	483mm	451mm

